




Specifications

PVE 24VM

Vibro Hammer

USA

Dimensions in inches

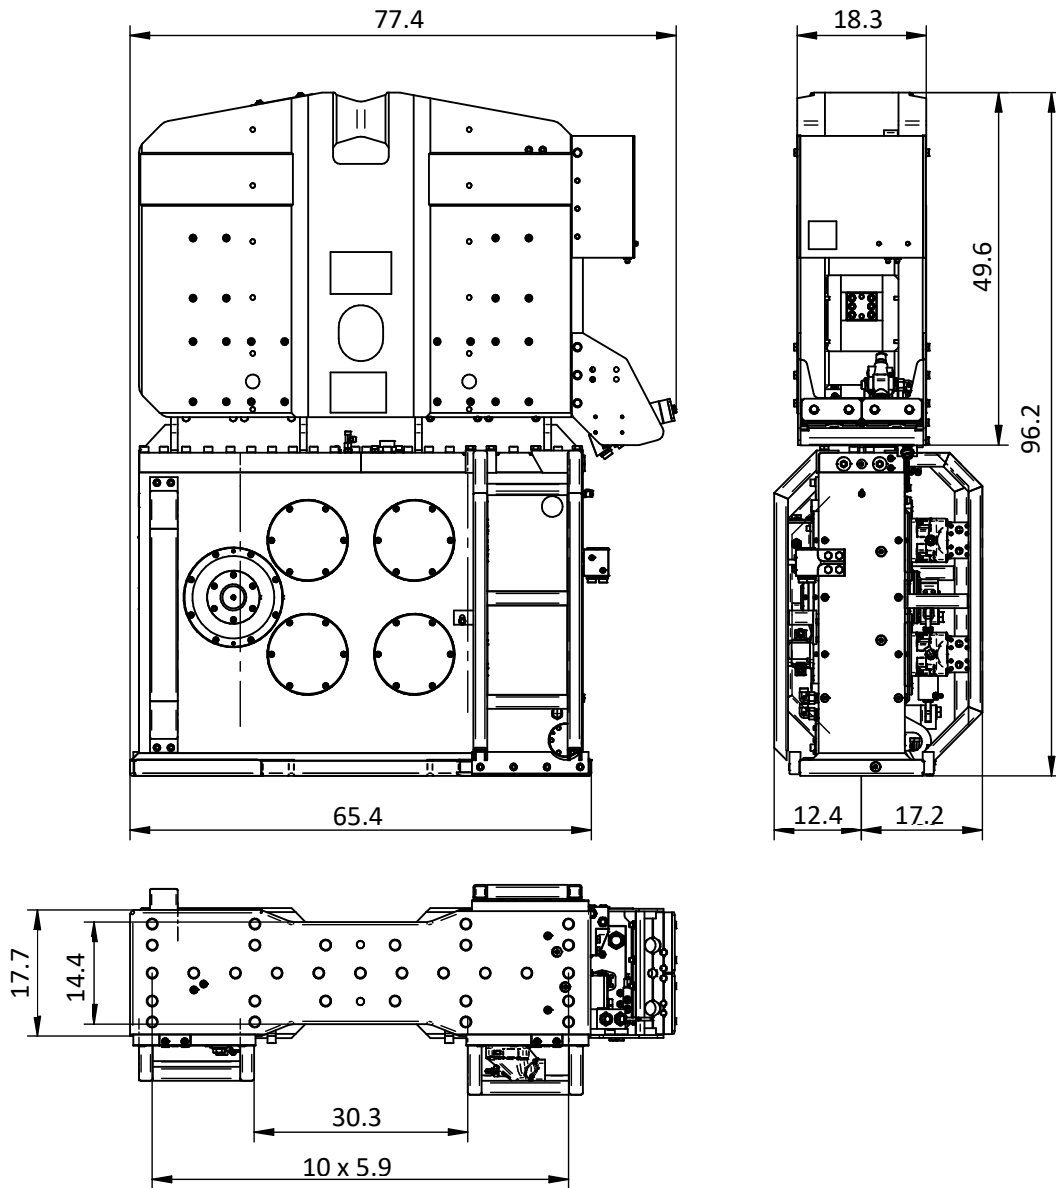

Specifications

PVE 24VM

Eccentric moment	0-2,083 in-lbs	Clamps:	
Max. centrifugal force	0-157 ton	Sheet pile clamp	160TU
Max. frequency	2300 rpm	Transport weight per piece	2,425 lbs
Max. amplitude excluding 200TU-P	0.55 in	Double clamps	81TC
Max. amplitude including 200TU-P	0.41 in	Transport weight per piece	1,058 lbs
Max. static line-pull	41 ton		
Max. operating pressure	5,076 psi	Powerpack:	
Max. oil flow	130 gal/min	Model	500 series
Forced lubrication	yes		
Dynamic weight excluding 200TU-P	7,716 lbs	Hose set:	
Dynamic weight including 200TU-P	10,141 lbs	Length	98 ft
Total weight excluding 200TU-P & hoses	13,272 lbs	Transport weight (±)	1,356 lbs