




Specifications

PVE 250M

Vibro Hammer

USA

Dimensions in inches

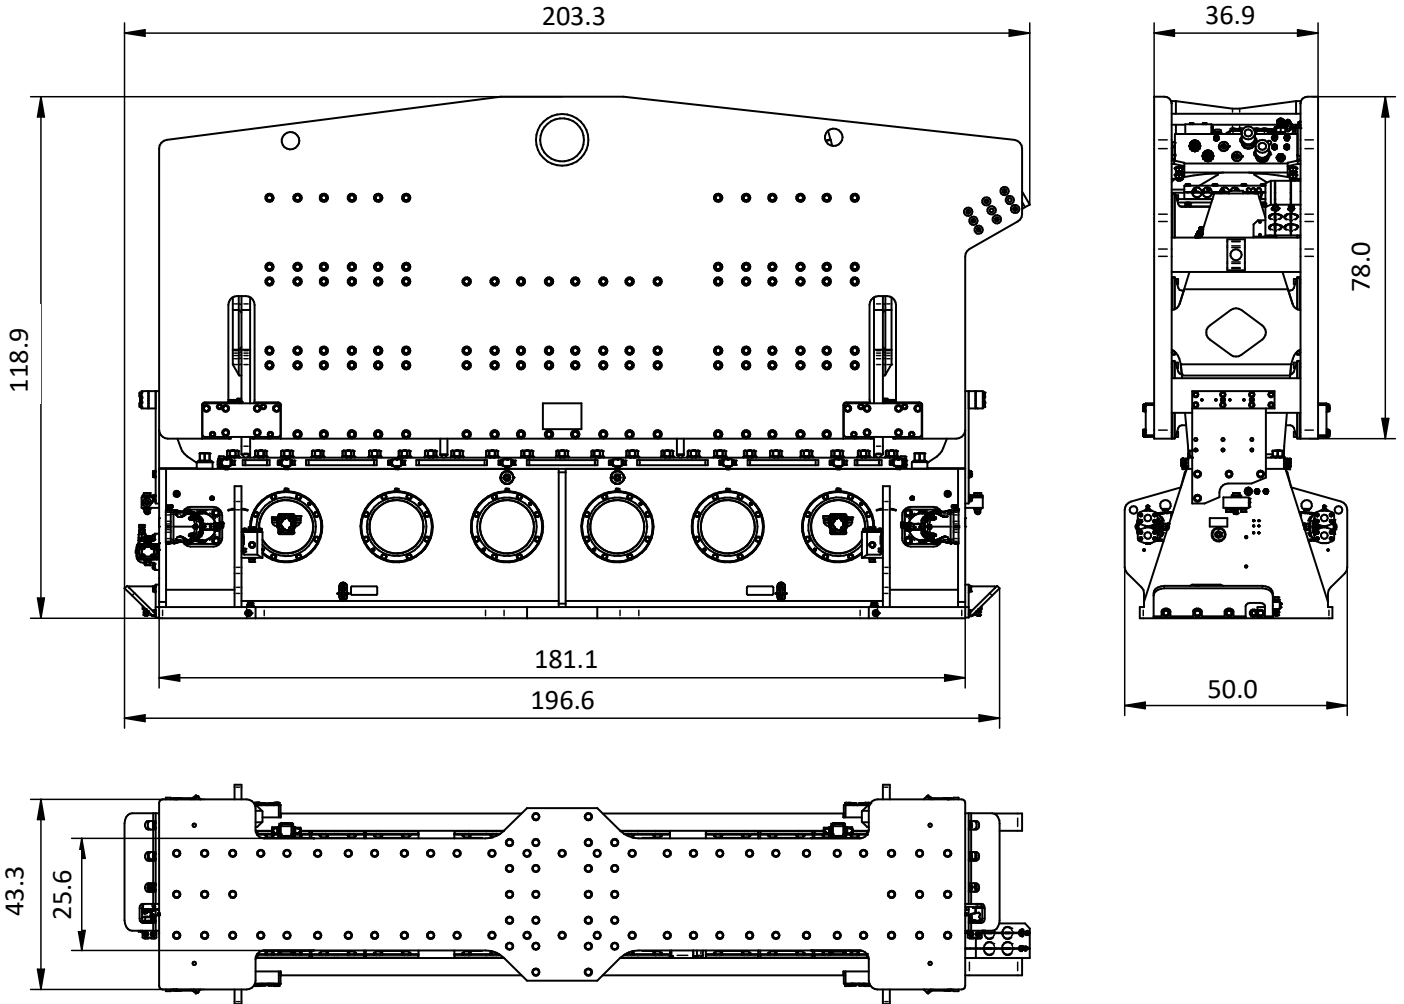

Specifications

PVE 250M

Eccentric moment	21,701 in-lbs	Clamps:	
Max. centrifugal force	604 ton	Sheet pile clamp	350TC (2x)
Max. frequency	1,400 rpm	Transport weight per piece	6,570 lbs
Max. amplitude excluding 350TC (2x)	0.97 in		
Max. amplitude including 350TC (2x)	0.71 in		
Max. static line-pull	371 ton		
Max. operating pressure	5,076 psi	Powerpack:	
Max. oil flow	423 gal/min	Model	1600 series
Forced lubrication	yes		
Dynamic weight excluding 350TC (2x)	44,820 lbs	Hose set:	
Dynamic weight including 350TC (2x)	61,156 lbs	Length	197 ft
Total weight excluding 350TC (2x) & hoses	80,469 lbs	Transport weight (±)	6,085 lbs