




Specifications

PVE 50VM

Vibro Hammer

USA

Dimensions in inches

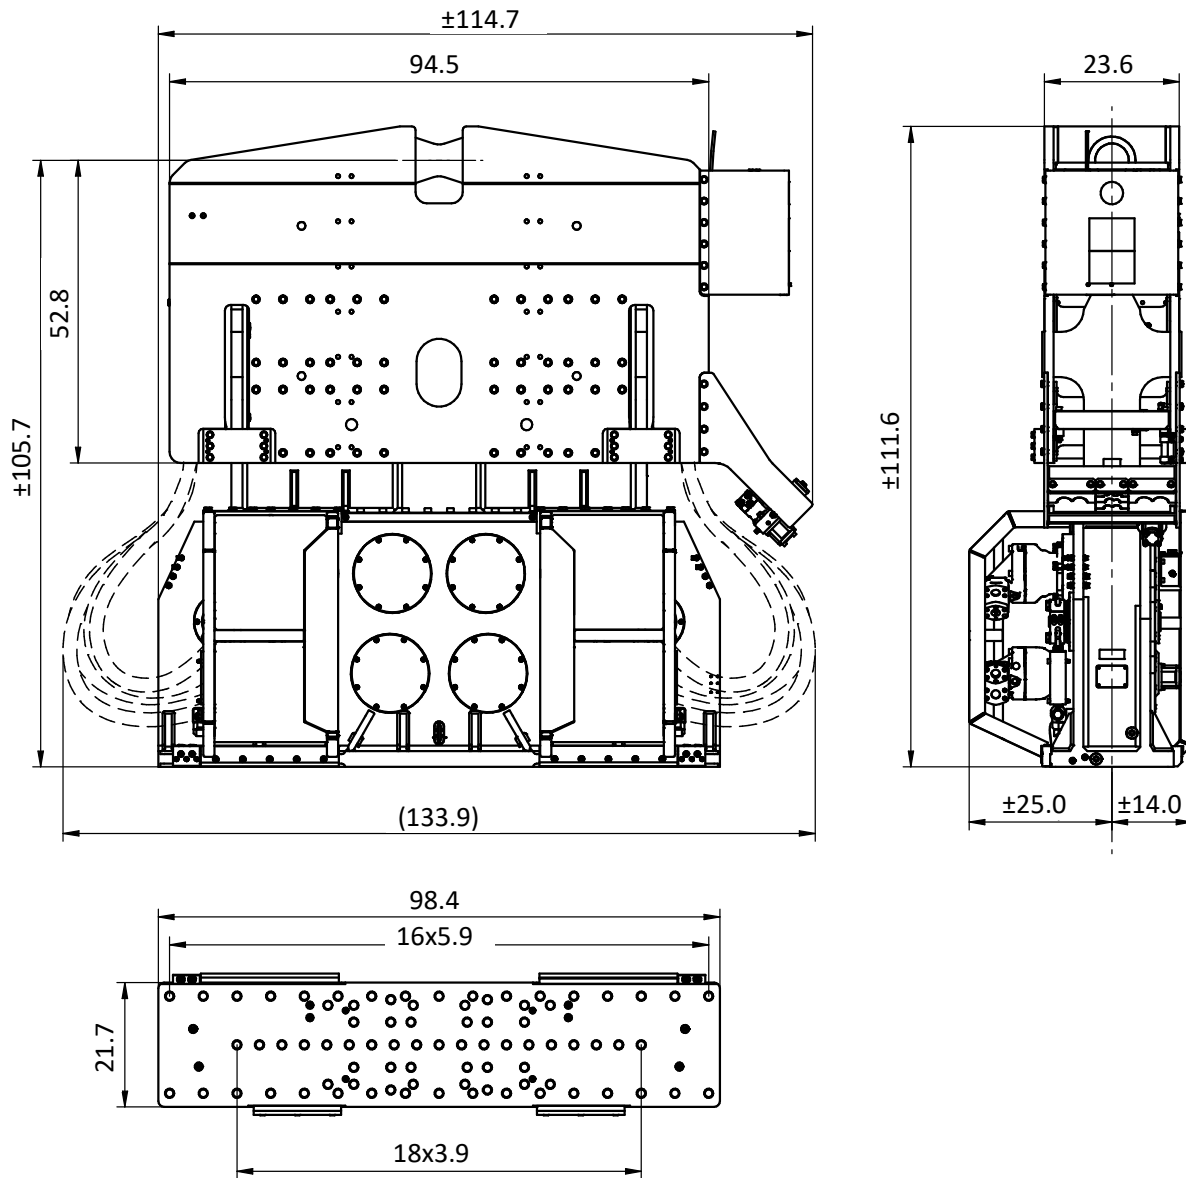

Specifications

PVE 50VM

Eccentric moment	0-4,340 in-lbs	Clamps:	
Max. centrifugal force	0-326 ton	Sheet pile clamp	350TU
Max. frequency	2,300 rpm	Transport weight per piece	5,732 lbs
Max. amplitude excluding 350TU	0.59 in	Double clamps	175TC
Max. amplitude including 350TU	0.43 in	Transport weight per piece	2,866 lbs
Max. static line-pull	82 ton		
Max. operating pressure	5,076 psi	Powerpack:	
Max. oil flow	365 gal/min	Model	1400 series
Forced lubrication	yes		
Dynamic weight excluding 350TU	14,551 lbs	Hose set:	
Dynamic weight including 350TU	20,283 lbs	Length	148 ft
Total weight excluding 350TU & hoses	22,179 lbs	Transport weight (\pm)	4,343 lbs