



**WOLTMAN 50 PR-FF**

## **WOLTMAN PILING & DRILLING RIGS**

High capacity, **Very quick to assemble** Fast and efficient,  
Very reliable, CAT engine, **Controlled type free-fall winches**


**DIESEKO GROUP**

**WOLTMAN**  
PILING & DRILLING RIGS

# WOLTMAN 50 PR-FF

Woltman is continuously improving their range of equipment. Developments in relation to emission standards and fuel efficiency might result in different specifications. No rights can be attached to the dimensions and specifications mentioned on this leaflet because they might have changed without further notification. All data is subject printing and conversion errors.

## TECHNICAL SPECIFICATIONS

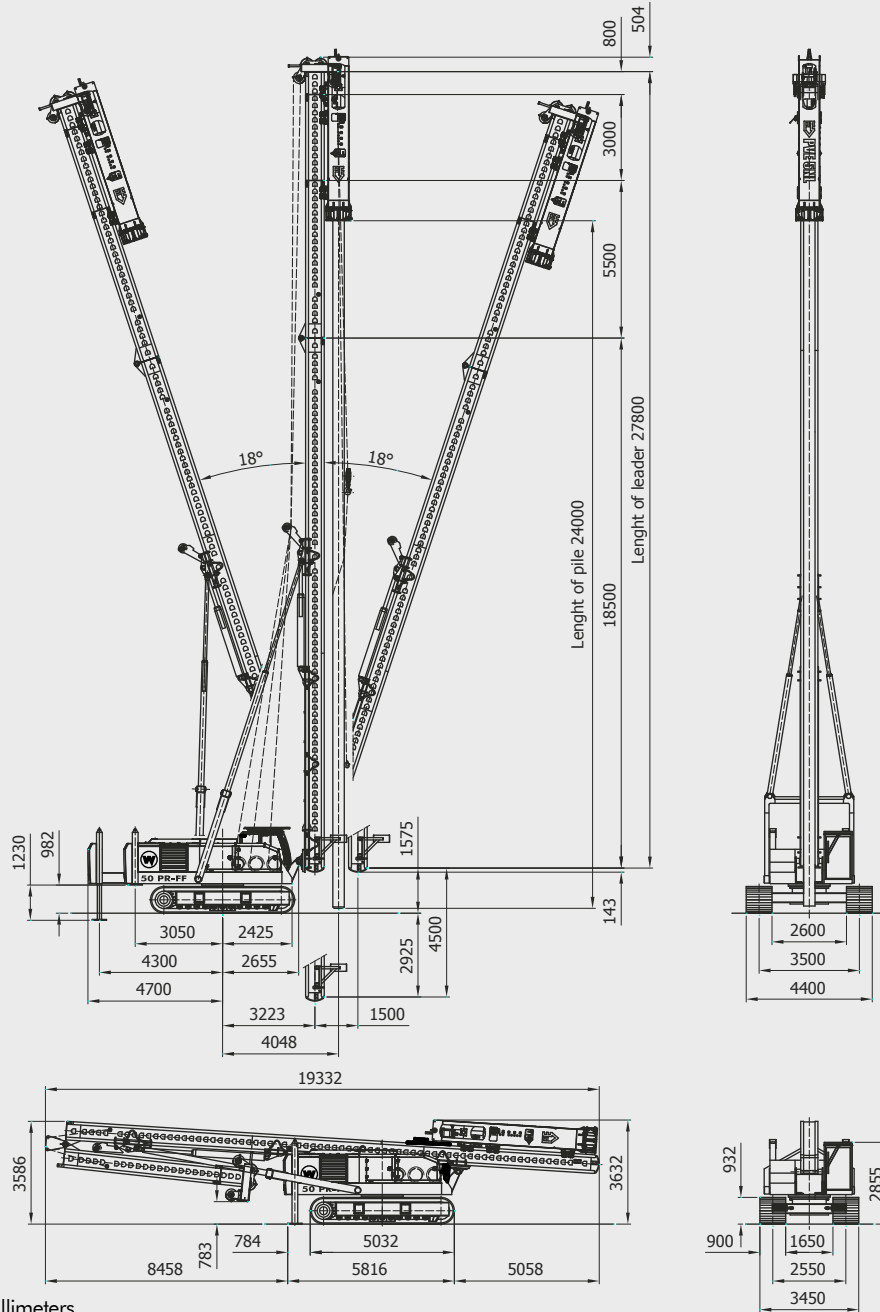

All dimensions are in millimeters

### Operational specifications

Recommended hammer size	PVE	5NL / 6NL / 7NL
Max. pile + hammer weight*	ton	18,5 lbs 40,785
Leader length std. (max.)	mtr	24,8 (27,8) ft 81.4 (91.2)
Max. pile length (max.)	mtr	21 (24) ft 68.9 (78.7)
Hammer winch (Zollern)	ton	14 lbs 30,865
Pile winch (Zollern)	ton	10 lbs 22,046
Operational weight incl. 5NL	ton	61 lbs 134,482
Max. oil flow	l/min	390 g/min 103
Max. pressure	bar	320 psi 4,641

### Weights

Transport weight excl. hammer	ton	52	lbs	114,640
Transport weight w/o counterweight	ton	45,1	lbs	99,428
Transport weight incl. PVE 5NL	ton	61	lbs	134,482

### Rig specifications

Engine	Caterpillar C-7.1		
Engine output	kW	183	HP 250
Hydraulics	Bosch Rexroth		
Hydraulic system	Openloop		

\* subject to capacity charts