




Specifications

PVE 28VM

Vibro Hammer

USA

Dimensions in inches

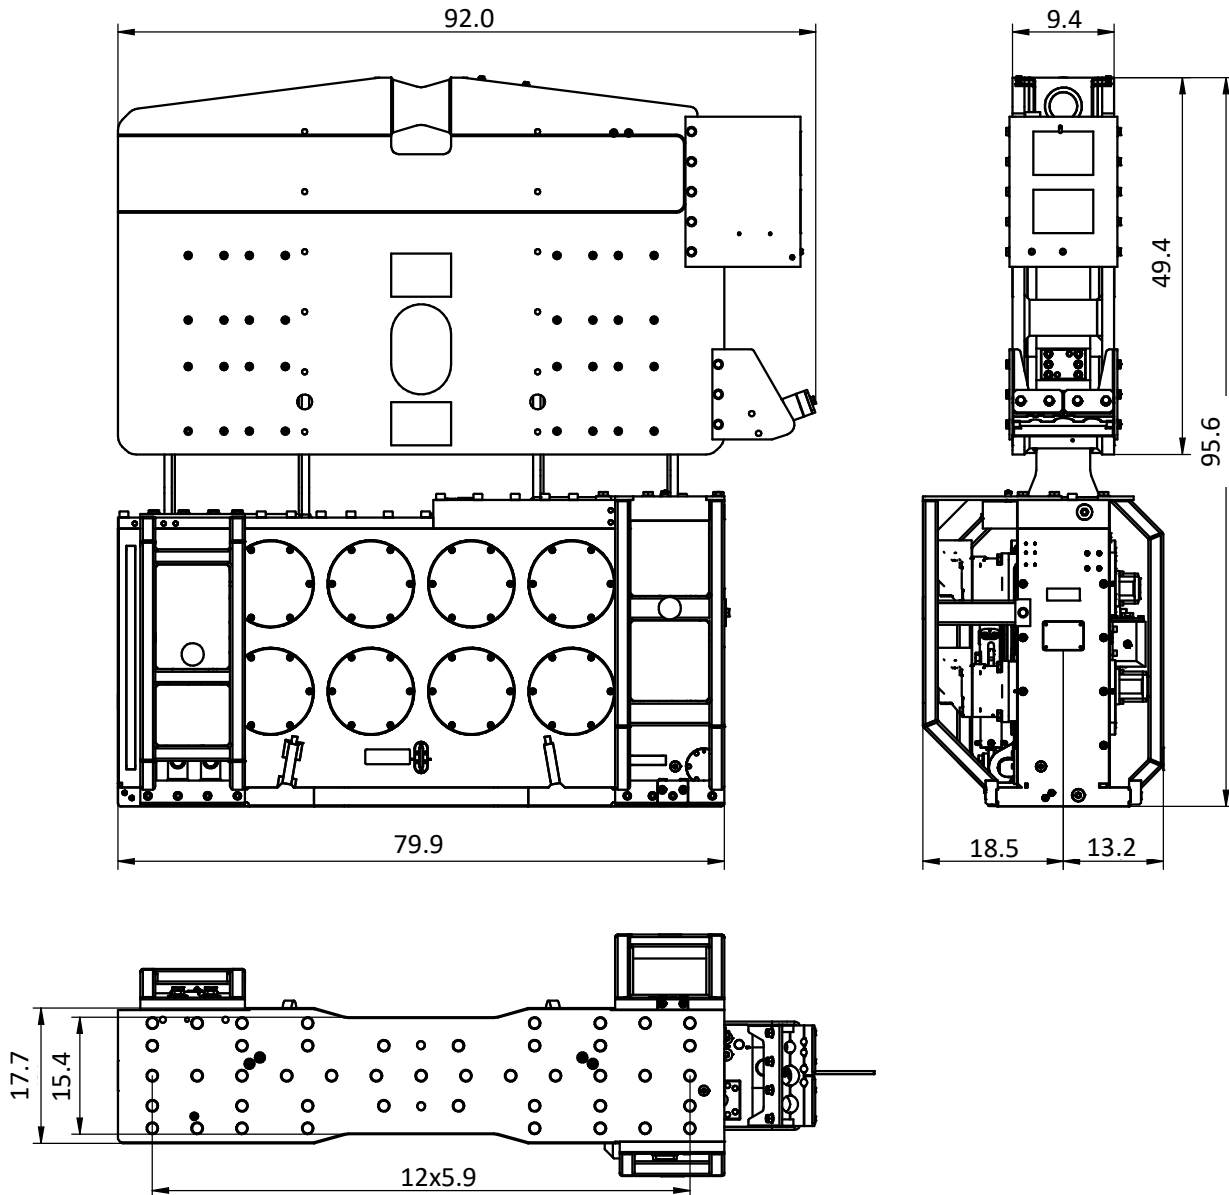

Specifications

PVE 28VM

Eccentric moment	0-2,431 in-lbs	Clamps:	
Max. centrifugal force	0-180 ton	Sheet pile clamp	200TU
Max. frequency	2,300 rpm	Transport weight per piece	2,866 lbs
Max. amplitude excluding 200TU-P	0.55 in	Double clamps	100TC
Max. amplitude including 200TU-P	0.43 in	Transport weight per piece	1,521 lbs
Max. static line-pull	41 ton		
Max. operating pressure	5,076 psi	Powerpack:	
Max. oil flow	156 gal/min	Model	600 series
Forced lubrication	yes		
Dynamic weight excluding 200TU-P	7,716 lbs	Hose set:	
Dynamic weight including 200TU-P	11,464 lbs	Length	148 ft
Total weight excluding 200TU-P & hoses	13,007 lbs	Transport weight (±)	2,471 lbs