




Specifications

PVE 40VM

Vibro Hammer

USA

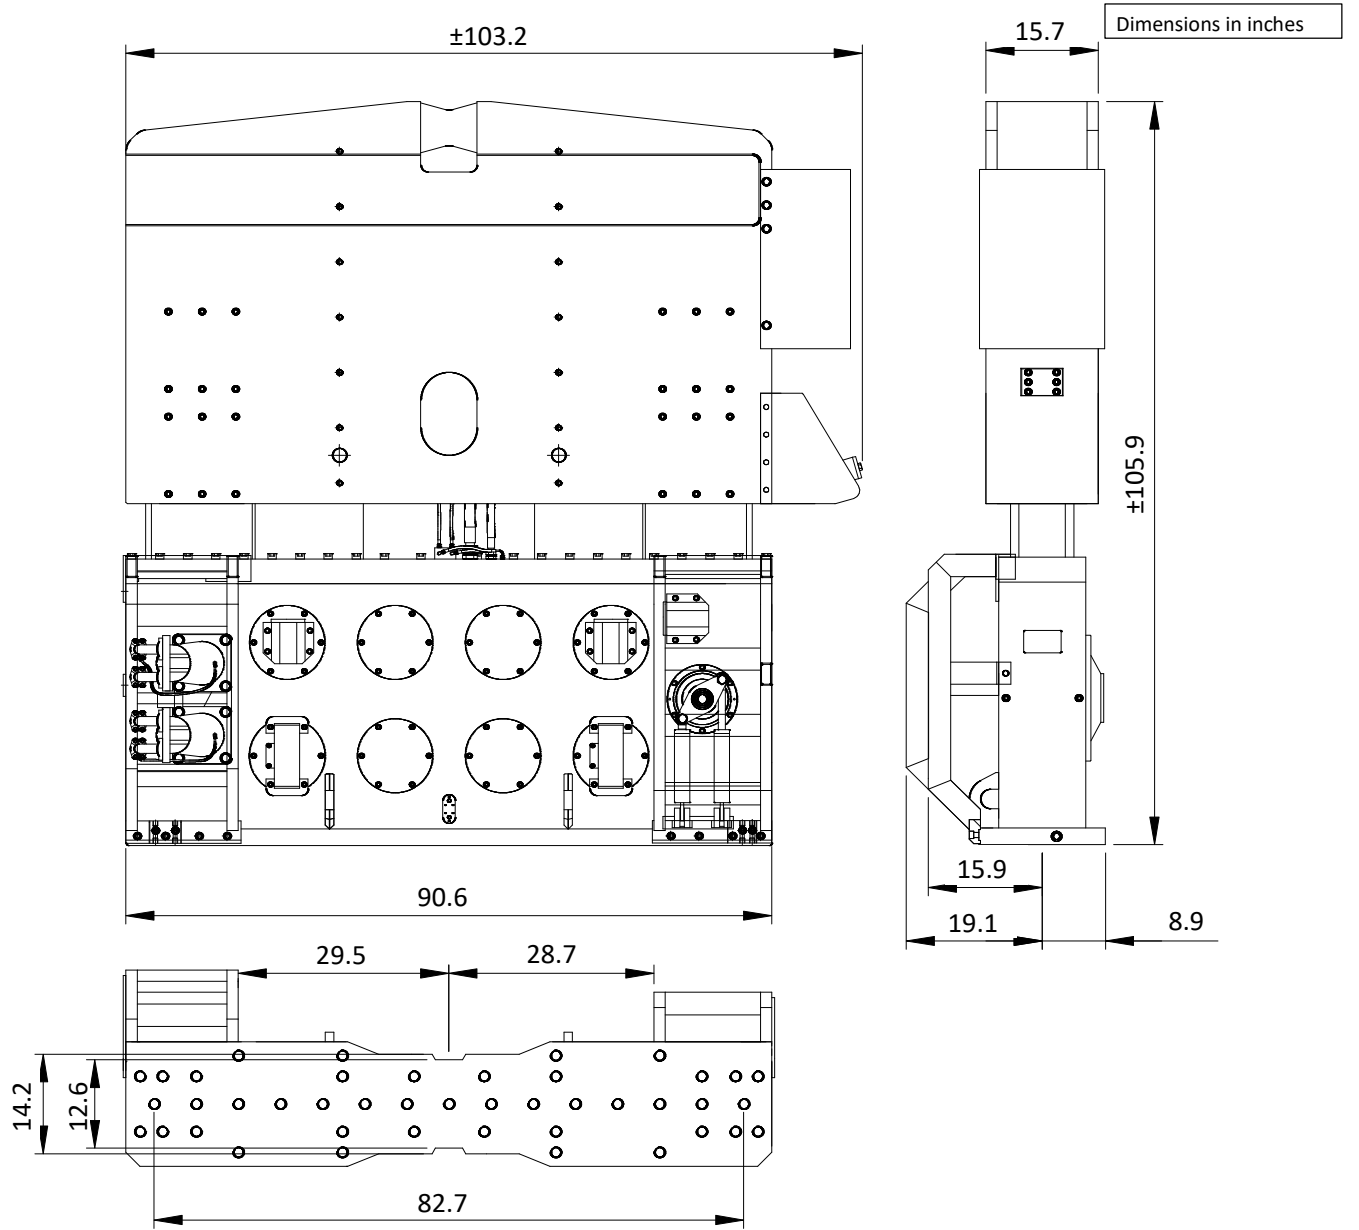

Specifications

PVE 40VM

Eccentric moment	0-3,472 in-lbs	Clamps:	
Max. centrifugal force	0-197 ton	Sheet pile clamp	350TU
Max. frequency	2,000 rpm	Transport weight per piece	5,732 lbs
Max. amplitude excluding 350TU	0.75 in	Double clamps	125TC
Max. amplitude including 350TU	0.46 in	Transport weight per piece	1,984 lbs
Max. static line-pull	41 ton		
Max. operating pressure	5,076 psi	Powerpack:	
Max. oil flow	211 gal/min	Model	800 series
Forced lubrication	yes		
Dynamic weight excluding 350TU	9,480 lbs	Hose set:	
Dynamic weight including 350TU	15,212 lbs	Length	148 ft
Total weight excluding 350TU & hoses	14,903 lbs	Transport weight (±)	2,549 lbs